

PAT SERIES




The PAT series unites the bench single spot welding machines. There are 3 sizes available:


- **PAT 2 8/13 kVA**
- **PAT 3 22/ kVA**
- **PAT 4 38/45 Kv**

While PAT 3 and PAT 4 distinguish themselves only through the installed power, maintaining both the dimensions and the mechanic characteristics identical, PAT 2 is completely different, much smaller and more compact.

The heads are made in aluminium and divided in support and rail, both built in a single block to guarantee solidity.

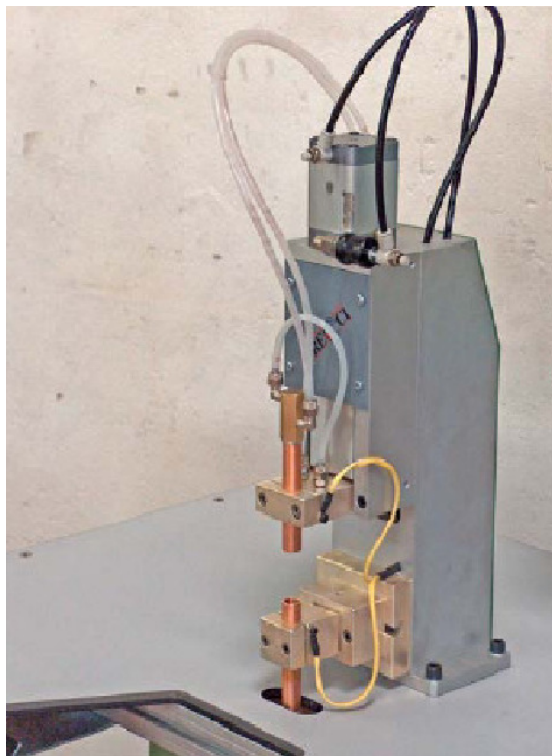

The slide moves on roll runners with adjustable load and is activated by the pneumatic cylinder. The lower part of the head was designed to allow for an easy application of different equipment.

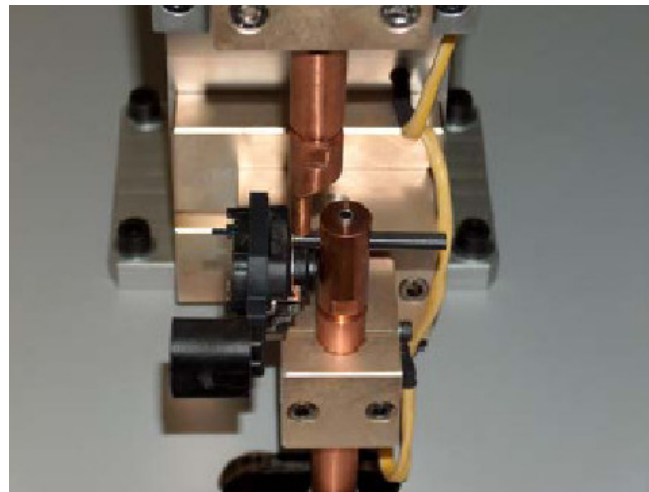

The three versions are also available in continuous current inverters with three-phase input, with the charges:

- **PAT 2HF 6,000 Amp**
- **PAT 3HF 12,000 Amp**
- **PAT 4HF 15,000 /30,000 Amp**

In the alternate current version, the control is usually given to the R4 command, very powerful and versatile.



While the inverter version has the RHF 2 commanding.

